

<Features>

- The 2000 Series features 20-mm width compact slide rails. Smallest cross section among SPCC rails.
- Travel is possible at both front and rear. (Two-way travel type)
- Brake-stop type. With a sharp pull from the full-travel position, the inner member can be disconnected. (Stopper is not provided.)
(* Do not insert the disconnected inner member into another rail. It may lead to poor operation.)

<Recommended screws>

- M3 truss head screw or binding head screw


<Grease>

- JX Nippon Oil and Energy EPNOC Grease AP(N) 2

<Surface treatment>

- Part numbers (1) (2): Electrogalvanizing (trivalent bright chromate)

Light load type

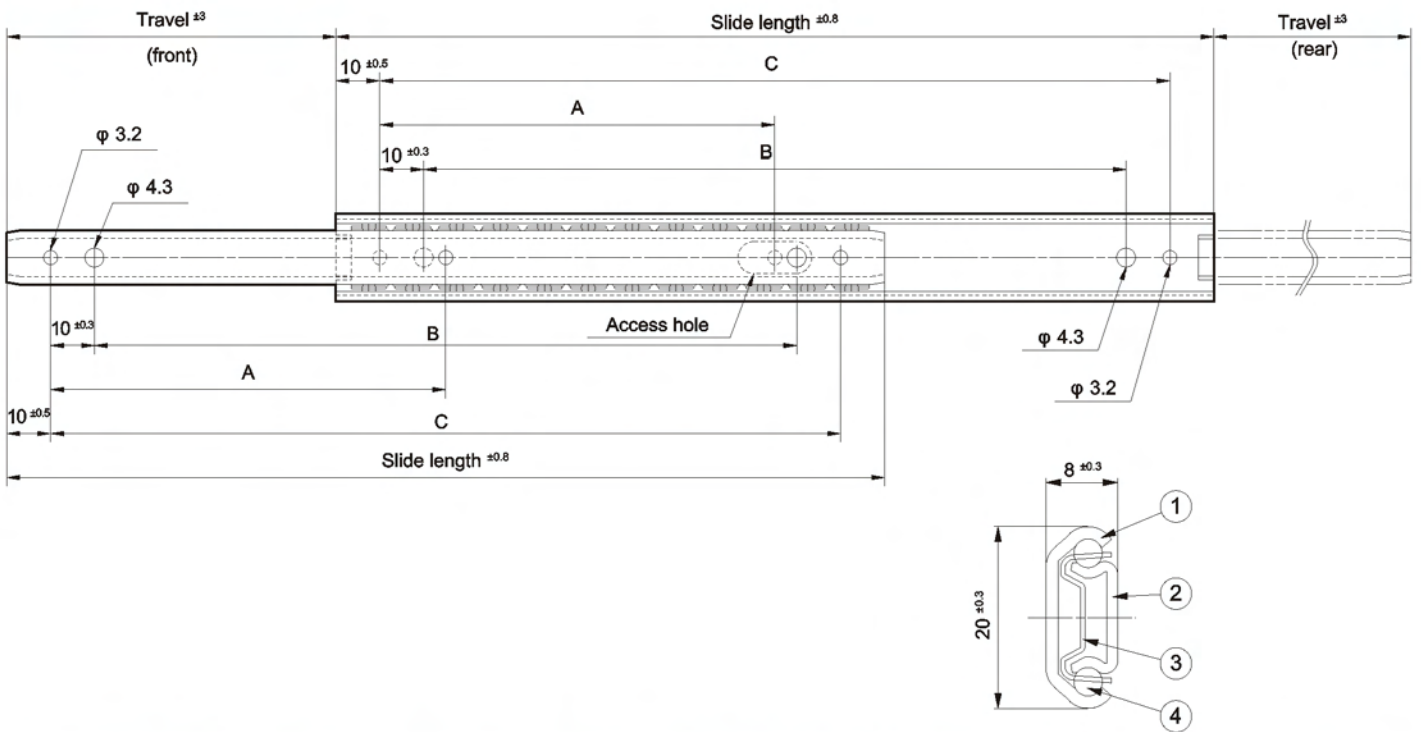

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm			Load capacity (N/pair)	Product weight (kg/piece)	Quantity in package (pieces)
			A	B	C			
70	70	15	-	30.0	50.0	196	0.04	216
100	100	25	-	60.0	80.0	196	0.06	216
150	150	45	-	110.0	130.0	196	0.08	144
200	200	75	90.0	160.0	180.0	196	0.11	72

Number	Part name	Material	Remark
①	Outer member	SPCC	t: 1.4
②	Inner member	SPCC	t: 1.2
③	Ball retainer	SECC	t: 0.5
④	Ball	SWCH	1/8*

* For special sizes, contact our sales staff.

* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

ORDER OK!

For requests concerning special sizes or specification changes etc., contact our sales staff.

Product number (product name) composition	Model name	Part number
	2020	- 70