

<Features>

- Quiet opening & closing using a plastic bumper.
- 27-mm width slim slide rail.

<Recommended screws>

- M4 binding head screw



<Grease>

- JX Nippon Oil and Energy EPNOC Grease AP(N) 2

<Surface treatment>

- Part numbers (1) (2): Electrogalvanizing (trivalent bright chromate)

Middle load type

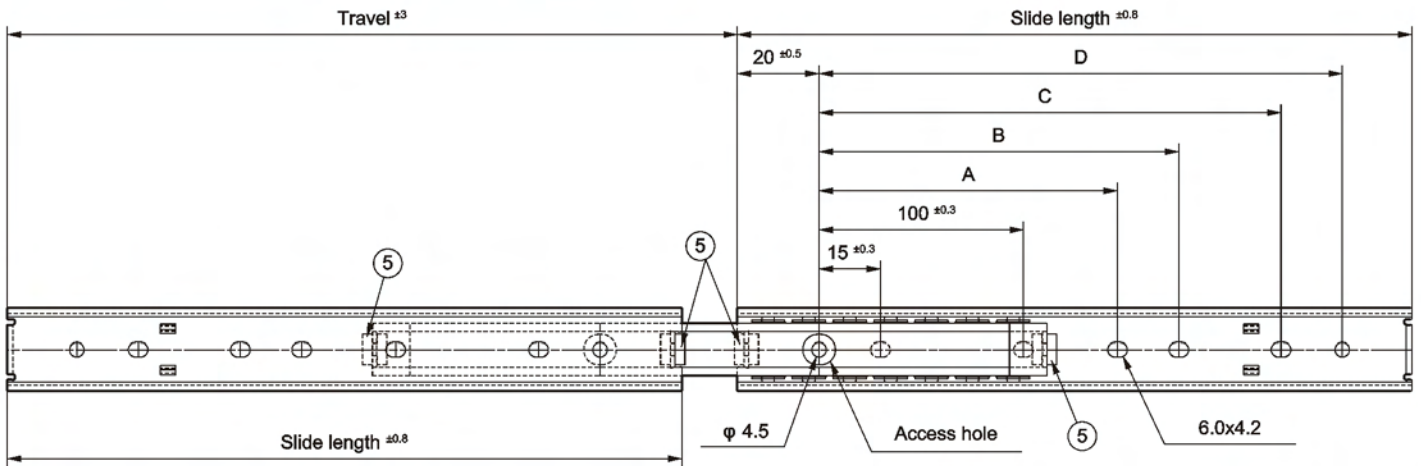

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm				Load capacity (N/pair)	Product weight (kg/piece)	Quantity in package (pieces)
			A	B	C	D			
200A	200	230	-	-	145.0	160.0	343	0.30	30
250A	250	279	-	150.0	195.0	210.0	353	0.38	30
300A	300	328	-	190.0	245.0	260.0	363	0.46	30
350A	350	377	-	225.0	295.0	310.0	353	0.54	30
400A	400	426	-	265.0	345.0	360.0	333	0.62	30
450A	450	476	205.0	300.0	395.0	410.0	304	0.71	30
500A	500	525	230.0	337.0	445.0	460.0	275	0.78	30

Number	Part name	Material	Remark
①	Cabinet member	SPCC	t: 1.6
	Drawer member	SPCC	t: 1.6
②	Center member	SPCC	t: 1.4
③	Ball retainer	SECC	t: 0.6
④	Ball	SWCH	3/16"
⑤	Silencing bumper	TPU	-

\* For special sizes, contact our sales staff.

\* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

ORDER OK!

For requests concerning special sizes or specification changes etc., contact our sales staff.

Product number (product name) composition	Model name	Part number
	2731M	- 200A