

<Features>

- There have divided left and right two kinds of L-shaped bracket
- Standard-use 35-mm sized slide rail.

<Recommended screws>


- M4 truss head screw or binding head screw

<Grease>


- JX Nippon Oil and Energy EPNOC Grease AP(N)2

<Surface treatment>

- Part numbers(1) (2) (3) (6):Electrogalvanizing (trivalent bright chromate) ; however, U33 is stainless steel and therefore unplated.

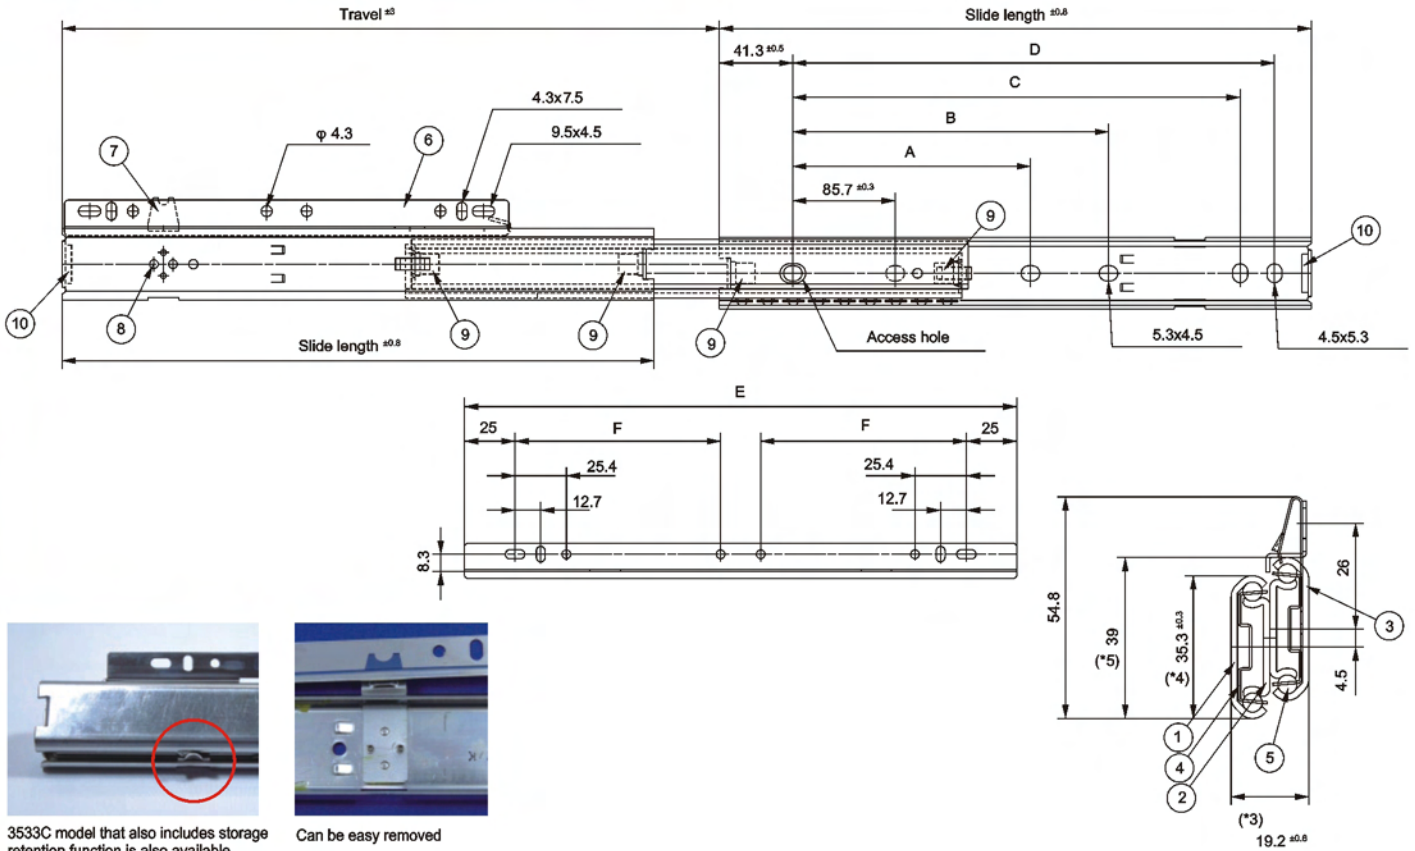

Middle load type



3533C model that also includes storage retention function is also available



Can be easily removed

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm				L-shaped bracket		Load capacity (N/pair)	Product weight (kg/piece)	Quantity in package (pieces)
			A	B	C	D	E	F			
12	304.8	334	-	123.1	218.3	245.3	273.0	101.6	412	0.64	12
14	355.6	385	-	173.9	269.1	296.1			431	0.76	12
16	406.4	435	-	224.7	319.9	346.9	375.0	101.6	431	0.86	12
18	457.2	486	187.3	275.5	370.7	397.7			451	0.97	12
20	508.0	537	212.7	326.3	421.5	448.5	527.0	177.8	431	1.08	12
22	558.8	588	238.1	377.1	472.3	499.3			422	1.19	12
24	609.6	639	263.5	427.9	523.1	550.1	392	1.42	402	1.29	12
26	660.4	689	288.9	478.7	573.9	600.9			392	1.42	12
28	711.2	740	314.3	529.5	624.7	651.7	382	1.51	12		

Number	Part name	Material	Remark
①	Cabinet member	SPCC	t: 1.6
②	Inner member	SPCC	t: 1.6
③	Drawer member	SPCC	t: 1.6
④	Ball retainer	SECC	t: 0.6
⑤	Ball	SWCH	3/16"
⑥	L-shaped bracket	SPCC	t: 1.0
⑦	Ouch	SUS304	-
⑧	Hollow rivet	SWCH	-
⑨	BlI retainer bumper	TPU	-
⑩	Felt bumper	Felt	-

* For special sizes, contact our sales staff.

* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

(*1) The SUS model (U33) material is SUS304 for (1) to (6), (8) is SUS XM-7

(*2) The SUS model (U33) plate thickness is t:1.5 for (1) to (3)

(*3) The SUS model height is 35.1mm *4 The SUS model thickness is 19.0mm *5 The SUS model is 39.6mm

Product number (product name) composition	Model name	Part number
	3533	- 12