

<Features>

- It is a thin rail which is to ensure the same travel amount as the 3531 model. (3531 : 19.2mm 3541 : 12.9mm)

<Recommended screws>


- M4 truss head screw or binding head screw

<Grease>

- JX Nippon Oil and Energy EPNOC Grease AP(N)2

<Surface treatment>

- Part numbers(1) (2) (5) : Electrogalvanizing (trivalent bright chromate)

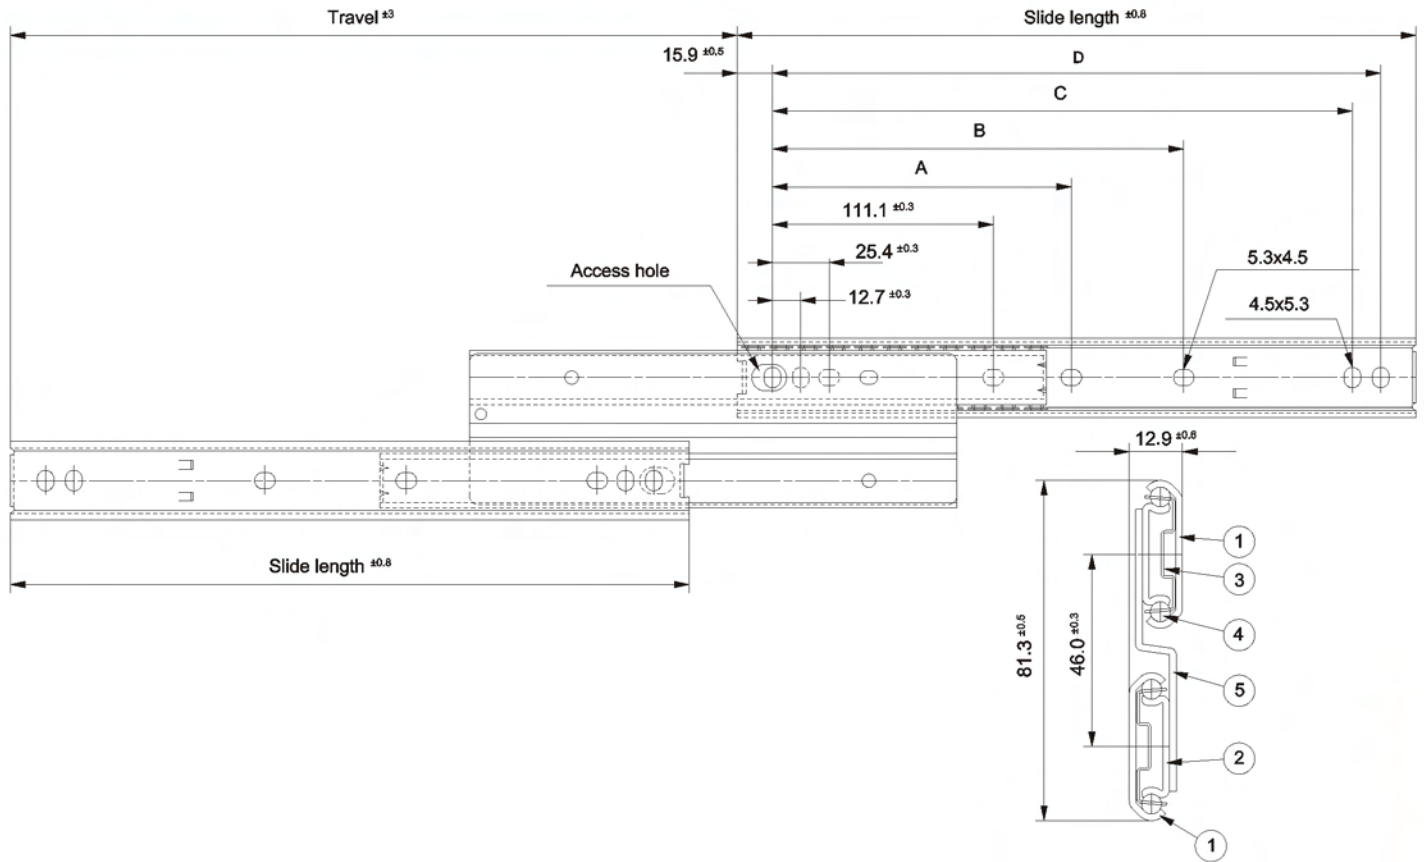

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm				Load capacity (N/pair)	Product weight (kg/piece)	Quantity in package (pieces)
			A	B	C	C			
12	304.8	326	-	149.2	260.3	273.0	431	0.80	16
14	355.6	377	-	200.0	311.1	323.8	451	0.96	16
16	406.4	428	-	250.8	361.9	374.6	451	1.12	16
18	457.2	479	225.4	301.6	412.7	425.4	471	1.26	16
20	508.0	529	250.8	352.4	463.5	476.2	451	1.41	16
22	558.8	580	276.2	403.2	514.3	527.0	441	1.60	16
24	609.6	631	301.6	454.0	565.1	577.8	422	1.74	8
26	660.4	682	327.0	504.8	615.9	628.6	412	1.90	8
28	711.2	732	352.4	555.6	666.7	679.4	402	2.05	8

Number	Part name	Material	Remark
①	Cabinet member	SPCC	t: 1.6
	Drawer member	SPCC	t: 1.6
②	Center member	SPCC	t: 1.6
③	Ball retainer	SECC	t: 0.6
④	Ball	SWCH	3/16"
⑤	Inner plate	SPCC	t: 1.6

* For special sizes, contact our sales staff.

* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

ORDER OK!

For requests concerning special sizes or specification changes etc., contact our sales staff.

Product number (product name) composition	Model name	Part number
	3541	- 12

High load type