

<Features>

- Standard-use 35-mm rail compact overtravel type.
- Developed by making the 3531 model (thickness 19.2 mm) more than 6 mm thinner.
- A silencing bumper is provided to reduce the shock and noise of closing.

<Recommended screws>


- M4 truss head screw or binding head screw

<Grease>

- JX Nippon Oil and Energy EPNOC Grease AP(N) 2

<Surface treatment>

- Part numbers (1) (2) (3): Electrogalvanizing (trivalent bright chromate)

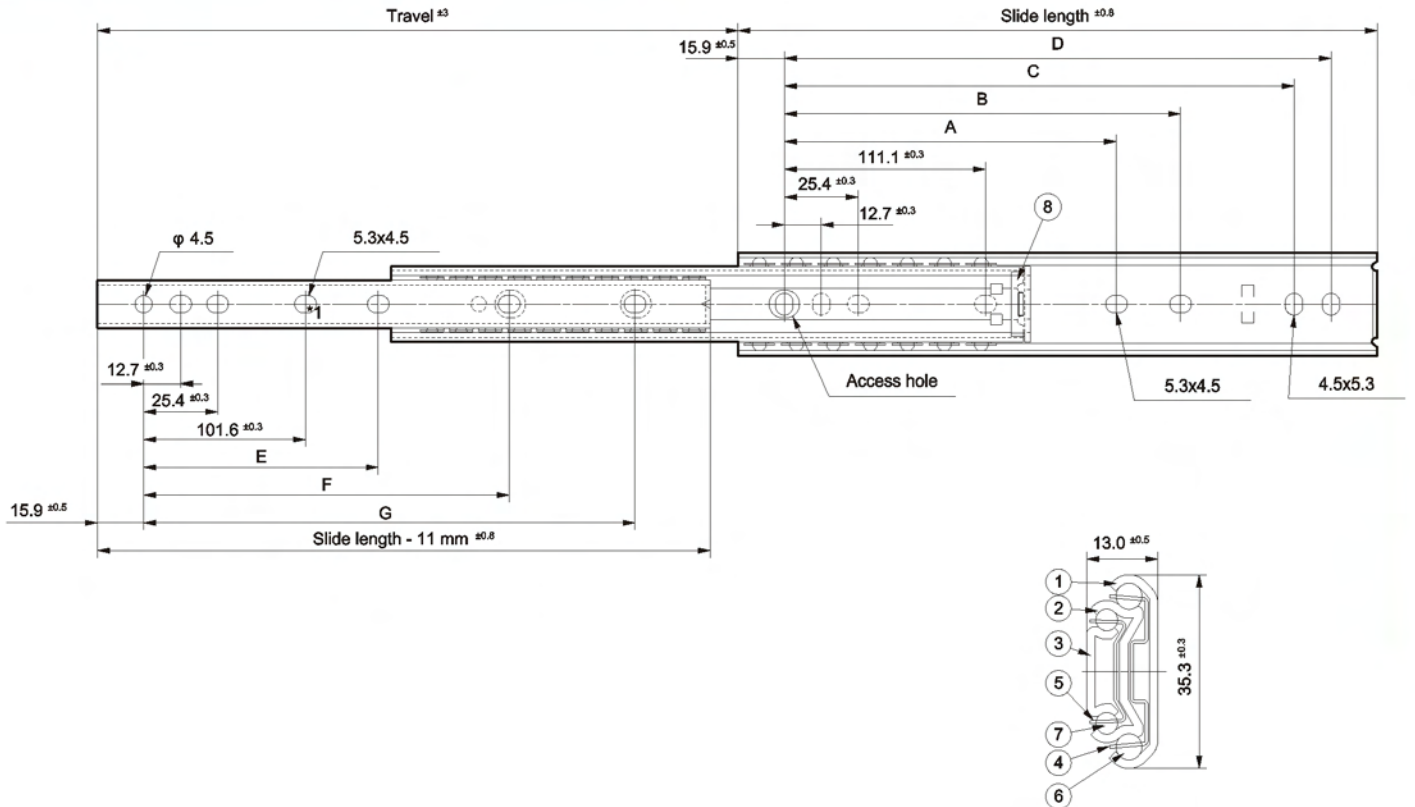

Middle load type

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm							Load capacity (N/pair)	Product weight (kg/piece)	Quantity in package (pieces)
			A	B	C	D	E	F	G			
8A	203.2	214	-	-	158.7	171.4	-	50.8	152.4	294	0.29	30
10A	254.0	265	-	-	209.5	222.2	-	-	203.2	324	0.37	30
12A	304.8	316	-	149.2	260.3	273.0	-	152.4	254.0	333	0.44	30
14A	355.6	366	-	200.0	311.1	323.8	-	203.2	304.8	343	0.52	30
16A	406.4	417	-	250.8	361.9	374.6	-	254.0	355.6	333	0.59	30
18A	457.2	468	212.7	301.6	412.7	425.4	207.7	304.8	406.4	333	0.67	30
20A	508.0	519	238.1	352.4	463.5	476.2	233.1	355.6	457.2	324	0.75	30
22A	558.8	570	263.5	403.2	514.3	527.0	258.5	406.4	508.0	304	0.83	30
24A	609.6	620	288.9	454.0	565.1	577.8	283.9	457.2	558.8	294	0.91	16

Number	Part name	Material	Remark
①	Outer member	SPCC	t: 1.6
②	Center member	SPCC	t: 1.6
③	Inner member	SPCC	t: 1.6
④	Ball retainer	SECC	t: 0.6
⑤	Ball retainer	SECC	t: 0.5
⑥	Ball	SWCH	3/16"
⑦	Ball	SWCH	5/32"
⑧	Plastic bumper for closing	TPU	-

* For special sizes, contact our sales staff.

* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

ORDER OK!

For requests concerning special sizes or specification changes etc., contact our sales staff.

Product number (product name) composition	Model name	Part number
	C350	- 8A