



<Features>

- World smallest class slide rail, the result of press molding. (as of our research in September 2014)
- Linear motion type: Inner member moves linearly within outer member.

<Recommended screws>


- M2.3 pan head screws or cross-recessed pan head screws for precision equipment

[Caution]

Inner member mounting screw length must be within mounting material thickness + 1.8 mm. (Long screws will contact the ball retainer and impede rail operation or cause damage.)

<Grease>

- Nichimoly G-03031X

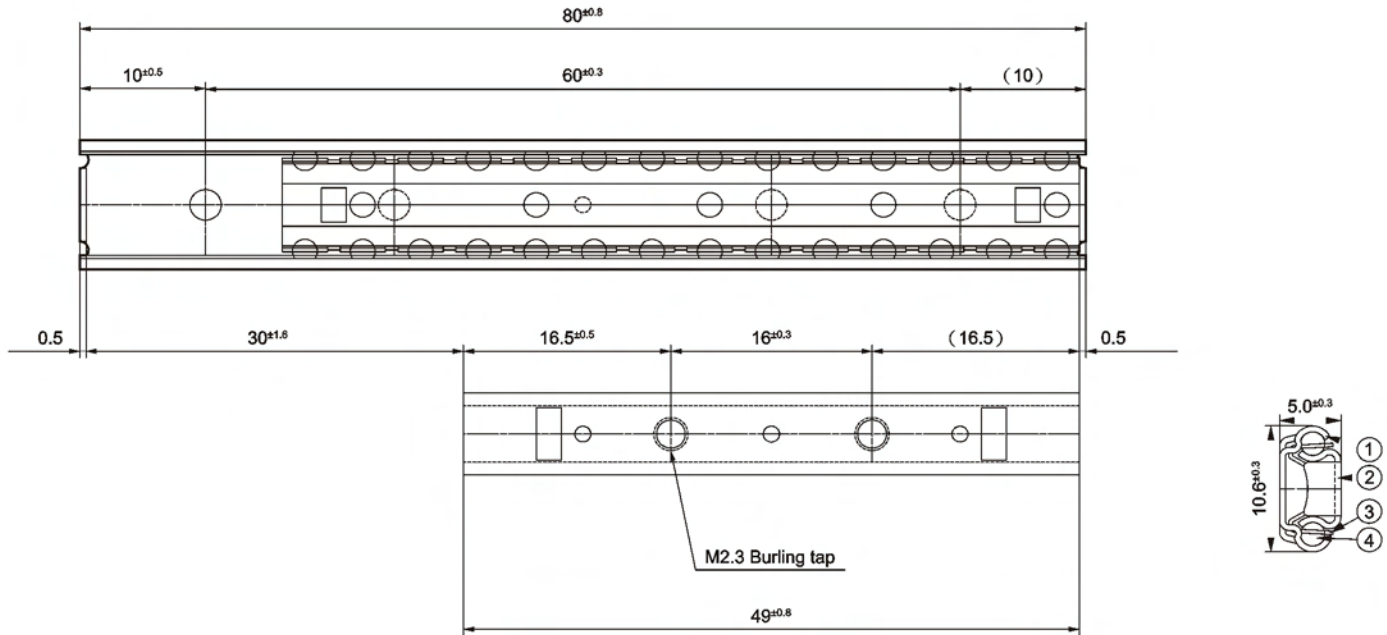

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm				Product weight (g/piece)	Quantity in package (pieces)
			A	B	C	D		
80	80.0	30.0	15.0	45.0	60.0	-	9	40
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-

Number	Part name	Material	Remark
①	Outer member	SUS304	t: 0.5
②	Inner member	SUS304	t: 0.5
③	Ball retainer	SUS304	t: 0.3
④	Ball	SUJ-2	5/64"

* For special sizes, contact our sales staff.

* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

(*1) Balls are SUJ-2.

ORDER OK!

For requests concerning special sizes or specification changes etc., contact our sales staff.