

**<Features>**

- World smallest class slide rail, made with press molding.  
(as of our research in September 2014)


**<Recommended screws>**

- M2.3 pan head screws or cross-recessed pan head screws for precision equipment
- [Caution]  
Inner member mounting screw length must be within mounting material thickness + 1.8 mm. (Long screws will contact the ball retainer and impede rail operation or cause damage.)

**<Grease>**

- Nichimoly G-03031X

Miniature type

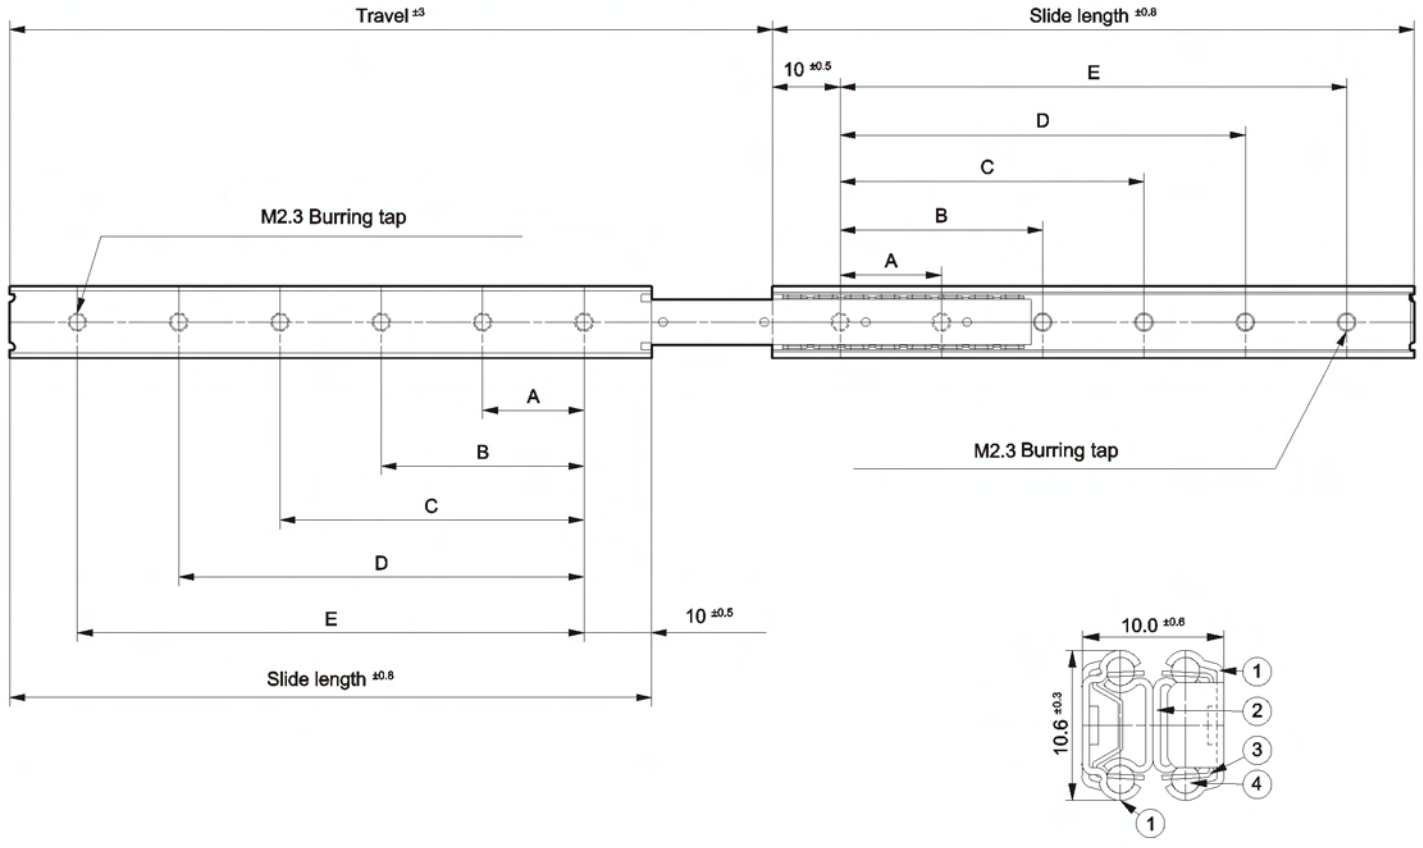

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm					Load capacity (N/pair)	Product weight (g/piece)	Quantity in package (pieces)
			A	B	C	D	E			
50	50.0	50.5	30.0	-	-	-	-	49	13	20
95	95.0	112.9	15.0	60.0	75.0	-	-	49	24	20
155	155.0	177.7	15.0	60.0	120.0	135.0	-	49	40	20
215	215.0	242.5	15.0	75.0	120.0	180.0	195.0	49	55	20

Number	Part name	Material	Remark
①	Cabinet member	SUS304	t: 0.5
	Drawer member	SUS304	t: 0.5
②	Center member	SUS304	t: 0.5
③	Ball retainer	SUS304	t: 0.3
④	Ball	SUJ-2	5/64"

\* For special sizes, contact our sales staff.  
\* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

(\*1) Balls are SUJ-2.

**ORDER OK!** For requests concerning special sizes or specification changes etc., contact our sales staff.

Product number (product name) composition	Model name	Part number
	U1031	- 50