

<Features>



- 14mm width compact slide rail.
- Series cumulative sales of over 2.7 million. (as of our research in August 2014)
- Two-Way travel slide rails

<Recommended screws>

- M2.6 Cross-recessed pan head screw for precision equipment
[Caution]
 - Inner member mounting screw length must be within mounting material thickness +2.0mm. (Long screws will contact the ball retainer and impede rail operation or cause damage.)
 - Ordinary pan head screws may contact the ball retainer and impede rail operation or cause damage.

<Grease>

- Nichimoly G-03031X

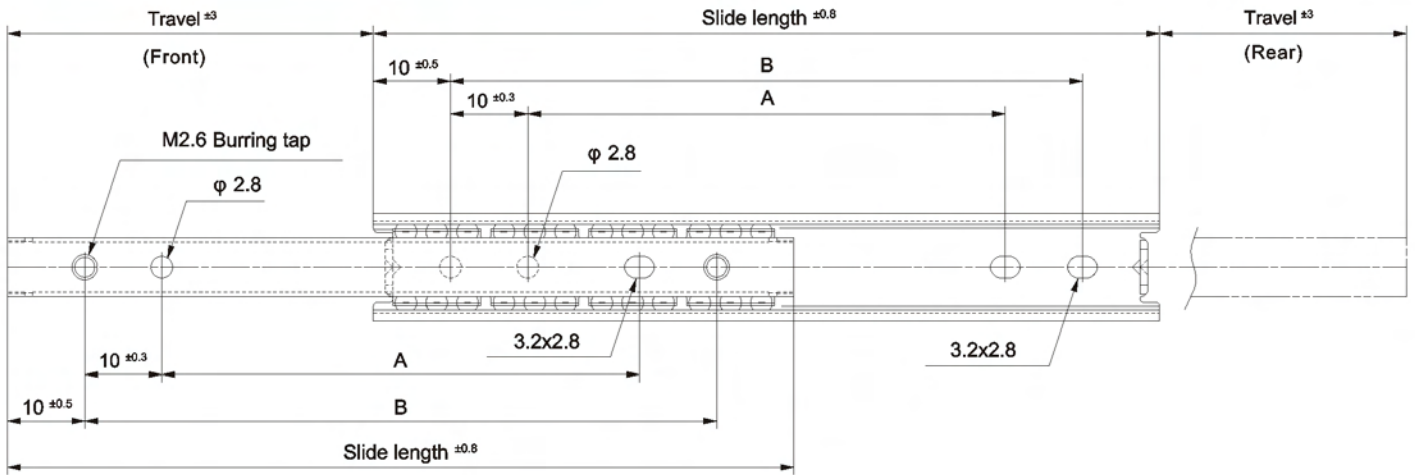

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm		Load capacity (N/pair)	Product weight (g/piece)	Quantity in package (pieces)
			A	B			
70A	70.0	17.2	30.0	50.0	98.0	20	480
100A	100.0	21.8	60.0	80.0	98.0	30	240
125A	125.0	34.1	85.0	105.0	98.0	35	240
150A	150.0	59.1	110.0	130.0	98.0	45	240

Number	Part name	Material	Remark
①	Outer member	SUS304	t: 1.0
②	Inner member	SUS304	t: 0.8
③	Ball retainer	SUS304	t: 0.3
④	Ball	SWCH	7/64"

* For special sizes, contact our sales staff.

* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

(*1) Balls are SWCH

ORDER OK!

For requests concerning special sizes or specification changes etc., contact our sales staff.

Product number (product name) composition	Model name	Part number
	U1420	- 70A