

<Features>



- 16mm width compact slide rail.
- Correspondence until the slide length 400mm

<Recommended screws>

- M3 pan head screws
- [Caution]
 - Inner member mounting screw length must be within mounting material thickness +2.0mm. (Long screws will contact the ball retainer and impede rail operation or cause damage.)

<Grease>

- Nichimoly G-03031X

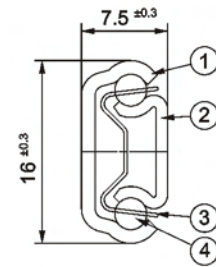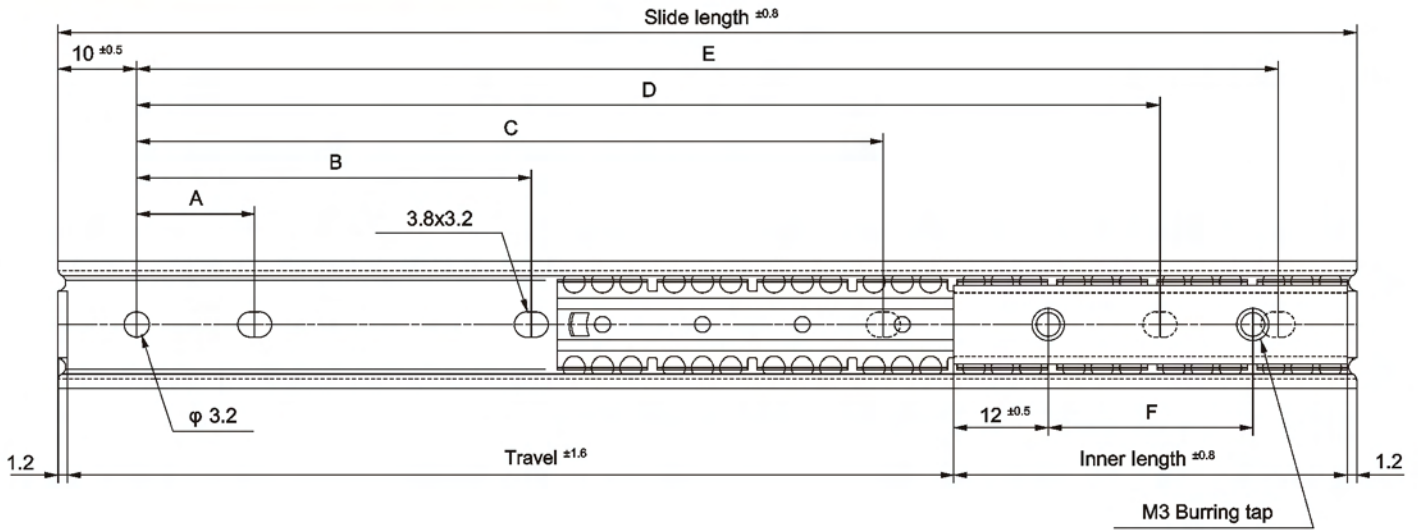

Part number	Slide length (mm)	Inner Length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm						Product weight (g/piece)	Quantity in package (pieces)
				A	B	C	D	E	F		
70A	70.0	38.0	29.6	-	-	-	-	50.0	14.0	25	416
100A	100.0	38.0	59.6	15.0	-	-	65.0	80.0	14.0	30	208
125A	125.0	38.0	84.6	15.0	-	-	90.0	105.0	14.0	40	208
150A	150.0	38.0	109.6	15.0	-	-	115.0	130.0	14.0	45	208
200A	200.0	50.0	147.6	15.0	-	-	165.0	180.0	26.0	60	104
300A	300.0	50.0	247.6	15.0	90.0	190.0	265.0	280.0	26.0	80	104
400A	400.0	50.0	347.6	15.0	130.0	250.0	365.0	380.0	26.0	105	104

Number	Part name	Material	Remark
①	Outer member	SUS304	t:1.2
②	Inner member	SUS304	t:1.0
③	Ball retainer	SUS304	t:0.3
④	Ball	SWCH	7/64"

* For special sizes, contact our sales staff.

* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

(*1) Balls are SWCH.

ORDER OK!

For requests concerning special sizes or specification changes etc., contact our sales staff.

Product number (product name) composition	Model name	Part number
	U1611	- 70A