



<Features>

- The inner member can be disconnected through disconnect spring operation.
- [Caution]
- Do not insert the disconnected inner member into another rail. (It may lead to poor operation.)
- Three types of disconnect springs are available with differing lock methods at closing.
- A lead-in guide is attached so that the inner member can be easily reinserted. (The lock is released without spring operation.)

<Recommended screws>

M4 truss head screw or binding head screw.


<Grease>

- Part numbers ① ② ③ ⑫ ⑬ :Electrogalvanizing (trivalent bright chromate)

Selecting a disconnect spring

Stopper takes effect at draw-out, and is manually released at inner disconnect. Lock release method at closing can be selected by disconnect spring type.

Type	Lock release method
C2	Manual release <Standard>
C3	Automatic release (release and closing without spring operation) <Standard>

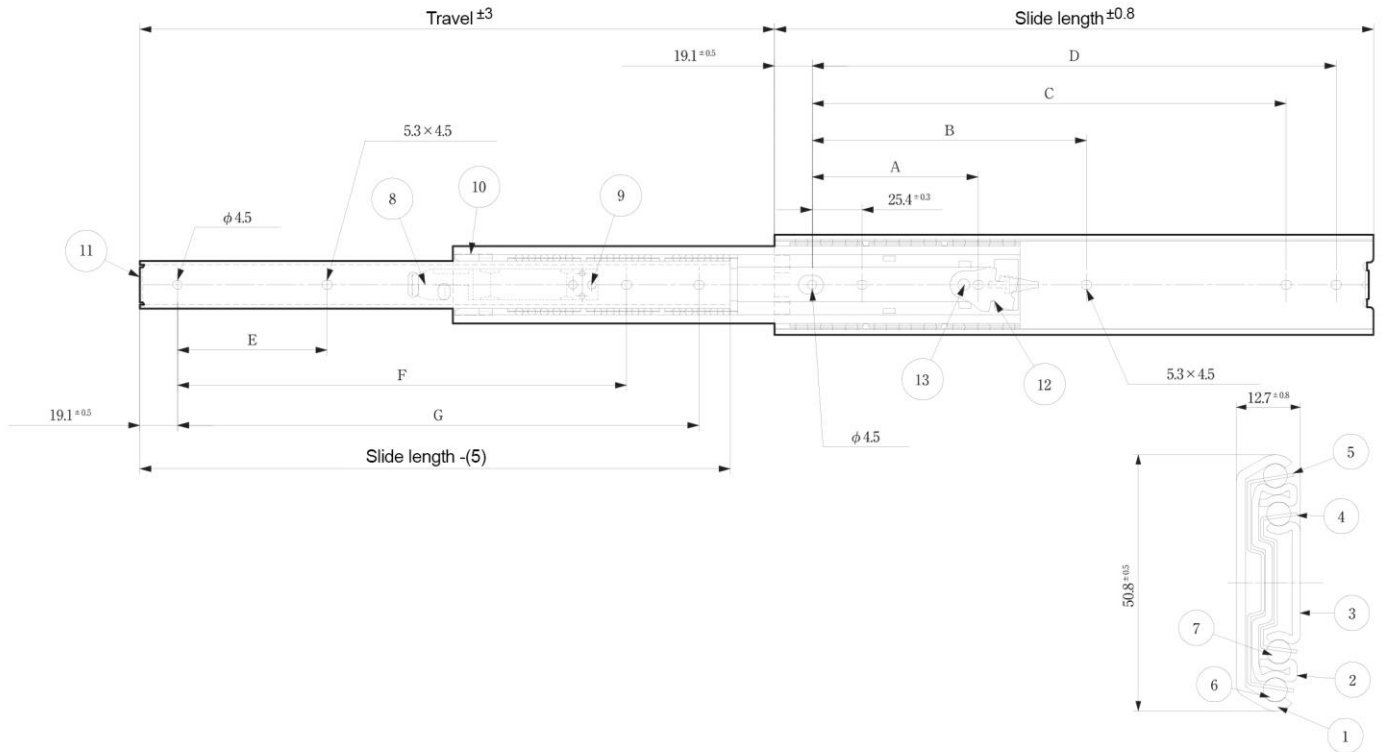

高荷重タイプ

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ±0.3mm							Load capacity (N/pair)	Product weight (kg/piece)	Quantity in package (pieces)
			A	B	C	D	E	F	G			
12	304.8	330	-	139.7	241.3	266.7	76.2	-	228.6	617	0.72	20
14	355.6	381	101.6	215.9	292.1	317.5	101.6	-	279.4	627	0.84	20
16	406.4	432	127.0	241.3	342.9	368.3	114.3	-	330.2	646	0.95	16
18	457.2	483	139.7	279.4	393.7	419.1	139.7	292.1	381.0	666	1.07	16
20	508.0	533	152.4	317.5	444.5	469.9	152.4	317.5	431.8	686	1.19	14
22	558.8	584	177.8	342.9	495.3	520.7	177.8	355.6	482.6	705	1.30	14
24	609.6	635	190.5	381.0	546.1	571.5	190.5	381.0	533.4	676	1.42	10
26	660.4	686	203.2	419.1	596.9	622.3	203.2	419.1	584.2	627	1.53	10
28	711.2	737	228.6	444.5	647.7	673.1	228.6	457.2	635.0	607	1.64	10

Number	Part name	Material	Remark
①	Outer member	SPCC	t:1.8
②	Center member	SPCC	t:1.4
③	Inner member	SPCC	t:1.6
④	Ball retainer	SECC	t:0.6
⑤	Ball retainer	SECC	t:0.6
⑥	Ball	SWCH	3/16"
⑦	Spring	SWCH	3/16"
⑧	Disconnect spring	SUS304	t=0.8
⑨	Hollow rivet	SWCH	-
⑩	Lead-in guide	PA6	-
⑪	Quiet bumper	-	-
⑫	Flipper lock	SPCC	t:2.0
⑬	Rivet	SWCH	-

*Changes may be made without notice for improved quality, environment and safety, without affecting function or mounting.

ORDER OK!

For requests concerning special sizes or specification changes etc., contact our sales staff.

Product number (product name) composition	Model name	Part number	Spring type
	Y515	- 12	C3