

**<Features>**

- 27-mm width slim slide rail.

**<Recommended screws>**

- M4 binding head screw

**<Grease>**



- JX Nippon Oil and Energy EPNOC Grease AP(N) 2

**<Surface treatment>**

- All stainless steel type.

**[Caution]**

We do not handle equivalent steel products, but we offer the 2731M with a quiet movement function and the 2731MC with a hold-detent mechanism; please refer to these.

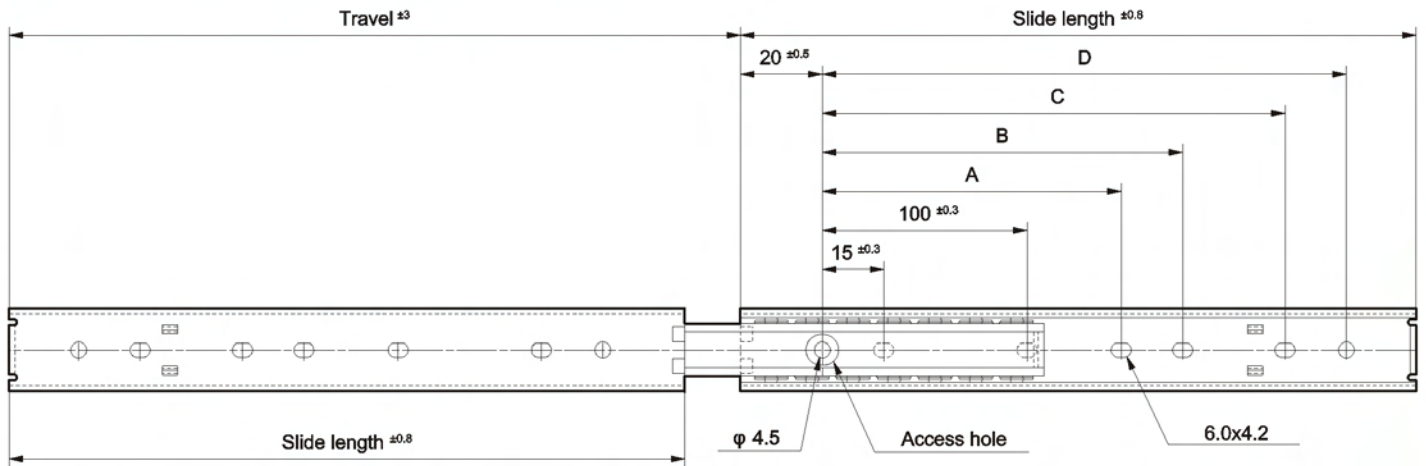

Middle load type

Part number	Slide length (mm)	Travel (mm)	Mounting hole (mm) ± 0.3 mm				Load capacity (N/pair)	Product weight (kg/piece)	Quantity in package (pieces)
			A	B	C	D			
200	200	218	-	-	145.0	160.0	343	0.30	30
250	250	267	-	150.0	195.0	210.0	353	0.38	30
300	300	316	-	190.0	245.0	260.0	363	0.46	30
350	350	365	-	225.0	295.0	310.0	353	0.54	30
400	400	415	-	265.0	345.0	360.0	333	0.61	30
450	450	464	205.0	300.0	395.0	410.0	304	0.69	30
500	500	513	230.0	337.0	445.0	460.0	275	0.77	30

Number	Part name	Material	Remark
①	Cabinet member	SUS304	t: 1.5
	Drawer member	SUS304	t: 1.5
②	Center member	SUS304	t: 1.5
③	Ball retainer	SUS304	t: 0.5
④	Ball	SUS440C	3/16"

\* For special sizes, contact our sales staff.

\* Changes may be made without notice for improved quality, environment, and safety, without affecting function or mounting.

**ORDER OK!**

For requests concerning special sizes or specification changes etc., contact our sales staff.

Product number (product name) composition	Model name	Part number
	U2731	- 200